ITEM NO.	PART NUMBER	DESCRIPTION	WEIGHT	QTY.
1	Plate connect 1 20210527 w283	EAST/WEST PLATES		198
2	Plate connect 2 20210527 w283	NORTH/SOUTH PLATES		198
3	Shim Plate conct 1 20210527 w283	1[IN] THICK		4
4	Shim Plate conct 1 20210527 w283	(1/2)[IN] THICK		80

TOTAL WEIGHT W/O OXIDATION PROTECTION = 127,760[LBF]

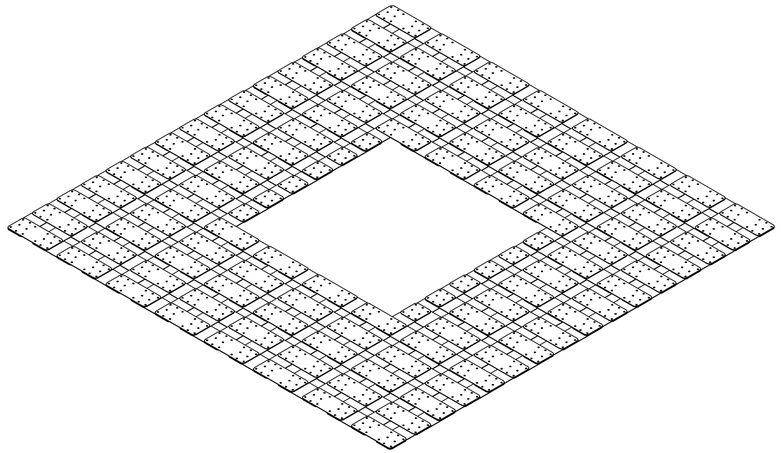

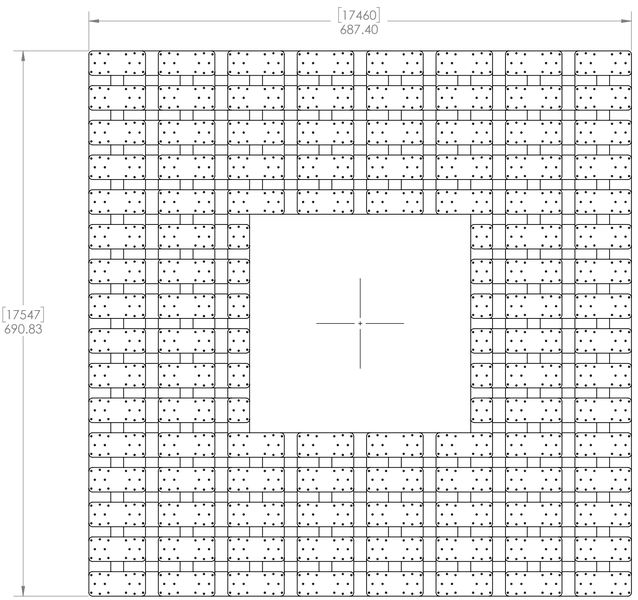

NOTE/S:
FOR PART DIMENSIONS REF J004
CAD IS MASTER

EXAMPLE AMBIENT TEMP [F]	EXAMPLE AMBIENT TEMP [C]	T6061-T6 dL PER 1000[IN]	T6061-T6 dL PER 1000[mm]
45.00	7.22	-0.183	-4.658
59.00	15.00	0.0	0.0
86.00	30.00	0.354	8.994

EXAMPLE:
LET DIM = 47.125[IN] (T6061-T6)
dL = 0.000013184 - 59)47.125
dL = 0.0167[in] [0.4234](mm)]

AT BIGT THE DIMENSION OF THE PART IS 47.125 + 0.0167 =47.142[IN]

GALVONIC PROTECTION REQUIRED:
ALUMINIZE TYPE II PREFERRED
GALVINIZE G100 ACCEPTABLE
THERMAL SPRAY AS/FOR ASSEMBLED

UNLESS OTHERWISE SPECIFIED:
TOLERANCES:
DIMENSIONS TAKEN AT 59[F]
DIMENSIONS TAKEN AT 15[C]
FRACTIONAL±0.13[1/5]
ANGULAR: 0.3[DEG]
TWO PLACE DECIMAL ±0.05[IN]
THREE PLACE DECIMAL ±0.005[IN]
VERIFICATION OF COMPONENTS MUST BE PERFORMED WITH TEMPERATURE COMPENDATION
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5

PARALLEL PLANES MAX 0.002[IN]
FLATNESS MAX 0.002[IN]
FINISH: AS REQUIRED

GAUGE/S:
DRAWINGS ARE AT 59[F] (15[C]): REFER TO MATERIAL SUPPLIER FOR THERMAL EXPANSION COEFFICIENT (CTE)
dL(ENG) = (DIM)*(CTE)1/R)*(TEMP-59)
dL(SI) = (DIM)*(CTE)1/K)*(TEMP-15)
***TOLERANCES DO NOT CHANGE

	NAME	DATE
DRAWN		
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

CREO DESIGNS, ENG DPT

TITLE: GLORIOUS CROSS
W14x283 CONNECTION PLATE ARRAY

SIZE	DWG. NO.	REV
D	J - 005	1
SCALE: 1:96		SHEET 1 OF 1